



**Накрайник DKOL с O-пръстен
конус 24° по DIN 3865**

КОД	DN	Резба	CH	T	A	L	PN /bar/
DKOL 5 12x1.5	5	M12x1.5	14	6	25.5	50	280
DKOL 5 14x1.5	5	M14x1.5	17	8	25.5	50	280
DKOL 6 12x1.5	6	M12x1.5	17	6	21	48.5	280
DKOL 6 14x1.5	6	M14x1.5	17	8	23.5	53	280
DKOL 6 16x1.5	6	M16x1.5	19	10	26	54	280
DKOL 6 18x1.5	6	M18x1.5	22	12	26	54	280
DKOL 8 16x1.5	8	M16x1.5	19	10	26	54	280
DKOL 8 18x1.5	8	M18x1.5	22	12	26	54	280
DKOL 10 16x1.5	10	M16x1.5	19	10	23.5	53.5	280
DKOL 10 18x1.5	10	M18x1.5	22	12	26.5	56.5	280
DKOL 10 22x1.5	10	M22x1.5	27	15	27	57	280
DKOL 12 22x1.5	12	M22x1.5	27	15	27.5	60.5	280
DKOL 12 26x1.5	12	M26x1.5	32	18	28	61	210
DKOL 16 26x1.5	16	M26x1.5	32	18	30	64	210
DKOL 16 30x2	16	M30x2	36	22	31	66.5	210
DKOL 20 26x1.5	20	M26x1.5	32	18	29	70	210
DKOL 20 30x2	20	M30x2	36	22	31	72	210
DKOL 25 36x2	25	M36x2	41	28	33.5	88.5	165
DKOL 32 45x2	32	M45x2	50	35	38.5	99	125
DKOL 40 52x2	40	M52x2	60	42	39	109.5	100

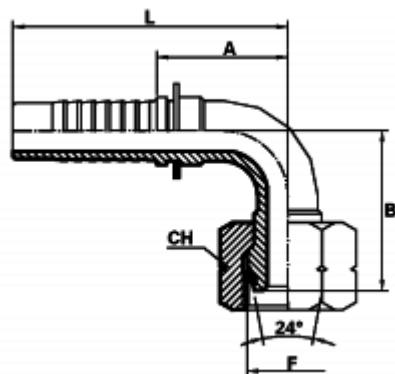

Накрайник DKOL с O-пръстен
конус 24° по DIN 3865 ъгъл 90°

КОД	DN	Резба	CH	T	B	A	L	PN /bar/
DKOL 90C 5 12x1.5	5	M12x1.5	14	6	31.5	29.5	53.5	280
DKOL 90C 5 14x1.5	5	M14x1.5	17	8	31.5	29.5	53.5	280
DKOL 90C 6 12x1.5	6	M12x1.5	17	6	31.5	29.5	57	280
DKOL 90C 6 14x1.5	6	M14x1.5	17	8	31.5	29.5	57	280
DKOL 90C 6 16x1.5	6	M16x1.5	19	10	32.5	29	56.5	280
DKOL 90C 6 18x1.5	6	M18x1.5	22	12	30.5	27	55	280
DKOL 90C 8 16x1.5	8	M16x1.5	19	10	32.5	31	59	280
DKOL 90C 8 18x1.5	8	M18x1.5	22	12	37	29	57	280
DKOL 90C 10 16x1.5	10	M16x1.5	19	10	38	33	63	280
DKOL 90C 10 18x1.5	10	M18x1.5	22	12	37.5	35.5	65	280
DKOL 90C 10 22x1.5	10	M22x1.5	27	15	42	34	64	280
DKOL 90C 12 22x1.5	12	M22x1.5	27	15	44	39.5	72	280
DKOL 90C 12 26x1.5	12	M26x1.5	32	18	46.5	39.5	72	210
DKOL 90C 16 26x1.5	16	M26x1.5	32	18	50.5	48.5	84	210
DKOL 90C 16 30x2	16	M30x2	36	22	53	48.5	84	210
DKOL 90C 20 26x1.5	20	M26x1.5	32	18	63.5	53.5	94.5	210
DKOL 90C 20 30x2	20	M30x2	36	22	55.5	56.5	97	210
DKOL 90C 25 36x2	25	M36x2	41	28	72.5	73	127	165
DKOL 90C 32 45x2	32	M45x2	50	35	86.5	92	152	125
DKOL 90C 40 52x2	40	M52x2	60	42	94	99	170	100

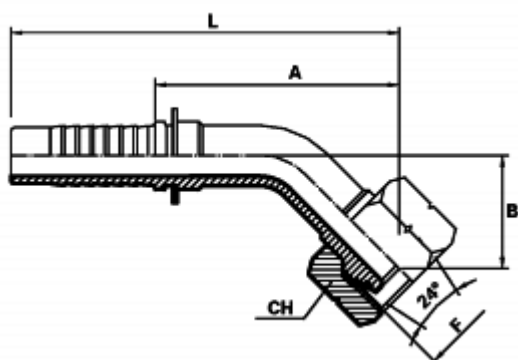

Накрайник DKOL с O-пръстен
конус 24° по DIN 3865 ъгъл 45°

КОД	DN	Inch	Резба	CH	T	B	A	L	PN /bar/
DKOL 45C 5 12x1.5	5	3/16"	M12x1.5	14	6	15	37	65	280
DKOL 45C 5 14x1.5	5	3/16"	M14x1.5	17	8	15	37	65	280
DKOL 45C 6 12x1.5	6	1/4"	M12x1.5	17	6	17	40	68	280
DKOL 45C 6 14x1.5	6	1/4"	M14x1.5	17	8	17	50	78	280
DKOL 45C 6 16x1.5	6	1/4"	M16x1.5	19	10	17	48.5	76	280
DKOL 45C 6 18x1.5	6	1/4"	M18x1.5	22	12	17	48.5	76	280
DKOL 45C 8 16x1.5	8	5/16"	M16x1.5	19	10	17	52.5	80	280
DKOL 45C 8 18x1.5	8	5/16"	M18x1.5	22	12	20	50	78	280
DKOL 45C 10 16x1.5	10	3/8"	M16x1.5	19	10	20	55	85	280
DKOL 45C 10 18x1.5	10	3/8"	M18x1.5	22	12	17	57	86.5	280
DKOL 45C 10 22x1.5	10	3/8"	M22x1.5	27	15	19	59	88.5	280
DKOL 45C 12 22x1.5	12	1/2"	M22x1.5	27	15	22	64	97	280
DKOL 45C 12 26x1.5	12	1/2"	M26x1.5	32	18	26	65	98	210
DKOL 45C 16 26x1.5	16	5/8"	M26x1.5	32	18	28	61.5	97	210
DKOL 45C 16 30x2	16	5/8"	M30x2	36	22	30	63.5	99	210
DKOL 45C 20 26x1.5	20	3/4"	M26x1.5	32	18	33.5	63	104	210
DKOL 45C 20 30x2	20	3/4"	M30x2	36	22	27	63	103.5	210
DKOL 45C 25 36x2	25	1"	M36x2	41	28	38.5	85.5	140	165
DKOL 45C 32 45x2	32	1.1/4"	M45x2	50	35	35	104.5	164.5	125
DKOL 45C 40 52x2	40	1.1/2"	M52x2	60	42	45	119	189	100